



## 1. Tube Packing


### 1.1 Tube Quantity 50 pcs / Tube

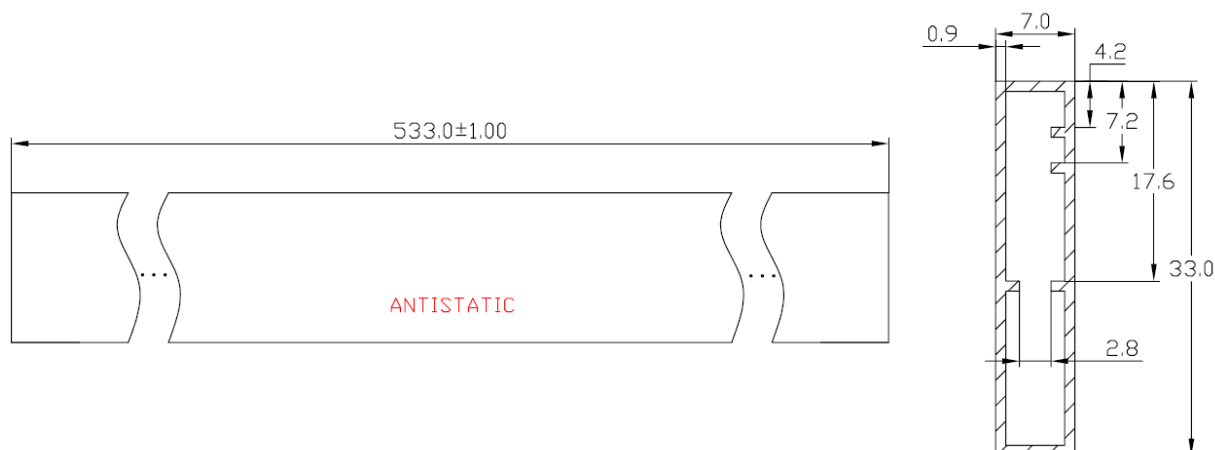

### 1.2 Inner Box



### 1.3 Carton

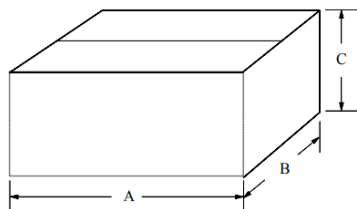


### 1.4 Dimensions (Unit : mm)

|           | A     | B     | C     |
|-----------|-------|-------|-------|
| Inner Box | 568±5 | 150±5 | 50±5  |
| Carton    | 585±5 | 275±5 | 170±5 |

## 1.5 Package

ONE ITEM(50pcs)

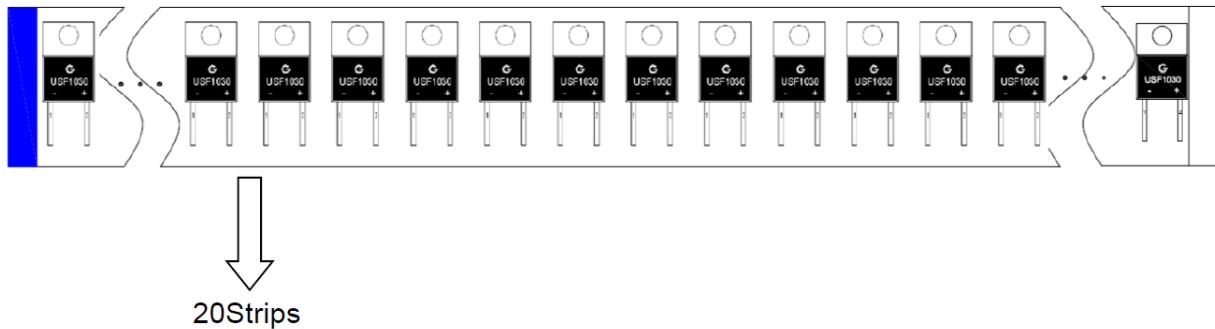

## 2. INNER BOX



BOX LABEL

100mm

PART NO.: MBR20100CT  
PKG.: TO-220AB  
RANGE: PASS  
LOT. NO.: YDJQ018H02  
Cus. NO.: 351060000

DATE: 2026-06-11  
Q'TY: 0.05KPCS



40mm

 Changzhou Galaxy Century Microelectronics Co., Ltd.

## 3. CARTON



Put in carton(5 inner box)



## 2. Marking

Each reel shall be legibly marked with the following items.

PART NO.: MBR20100CT

DATE: 2026-06-11

PKG.: TO-220AB

Q'TY: 0.05KPCS

RANGE: PASS

LOT. NO.: YDJQ018H02


Cus. NO.: 351060000



Changzhou Galaxy Century Microelectronics Co., Ltd.

## 3. Type

Product code of taping shall be composed as indicated below.

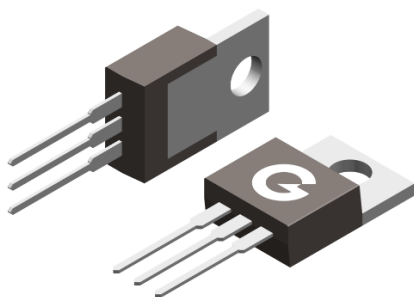

## 4. Recommended storage condition

Storage period

Use the products within 12 months after delivered.

Storage conditions

Products should be stored in the warehouse on the following conditions.

Temperature : 0~ 35° C

Humidity: 30 to 70% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.